



Window and Door Cills


1. Identify the cill size for a window and door if required.



STUB: Usually 80mm of cill. 70mm underneath the frame with 10mm of


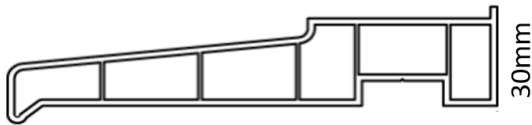


STANDARD: Usually 150mm. 70mm underneath the frame

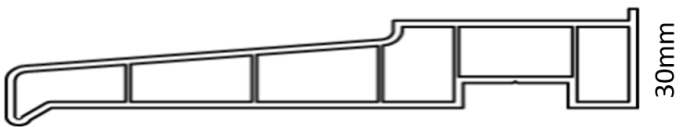


LONG: Usually 180mm. 70mm underneath the frame with 110mm of


2. Identify the threshold required for a door, this will sit on top of the cill if there is one. Also available as a wheelchair threshold compliant with Approved Document M.

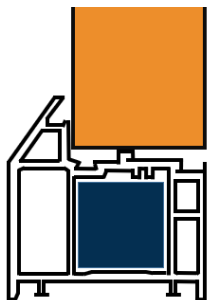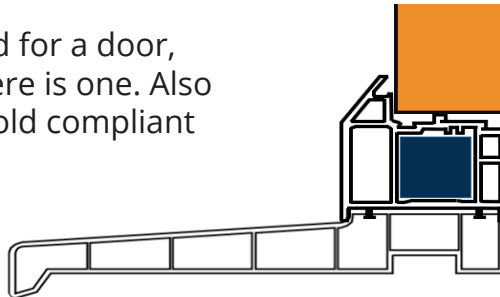

Standard Full Frame (UPVC)
Usually 70mm

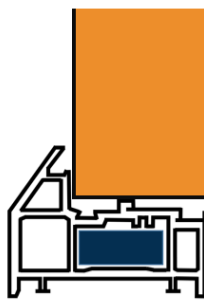

Low UPVC
Usually 50-60mm

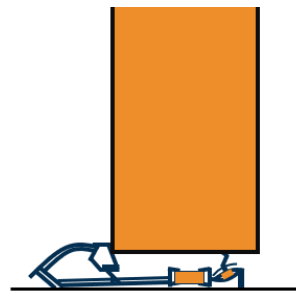

Low Aluminium
Usually 15-25mm